



HANGING FIXTURES SL-12-LG-SERIES

SPECIFICATIONS

CONSTRUCTION-SL-12-LG-BRS: Formed brass cage
All equipped with 18" long baby oval brass chain with cast brass hoop and FA-111-MD Junction Box

LENS: 1/8" gold iridescent glass

LAMP: 18 watt S-8 #1411

LAMP LIFE: 2000 hours average rating

SOCKET: Single contact bayonet, brass nickel plated screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v., both with 200° C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord. Consult factory for additional lengths

FINISH-AL-12-LG-BRS: Unfinished brass

ORDERING INFORMATION

CATALOG NO. DESCRIPTION

SL-12-LG-BRS Solid brass hanging lantern

12v Light sources: 12w, 18w (std.) or 25w Incandescent S.C.
10w or 20w T3 Halogen S.C.
10w or 20w T2.5 Xenon S.C.



120v Light sources: 35w T4 Halogen DC
15w T7 Incandescent DC
25w T8 Incandescent DC
5w or 7w Double Tube CF Compact Fluorescent
13 w Quad Tube CF Compact Fluorescent

Available in:


Raw Unfinished Brass -BRS
Acid Rust -BAR
Acid Verde -BAV



SL-12-LG



FA-111-SM-H

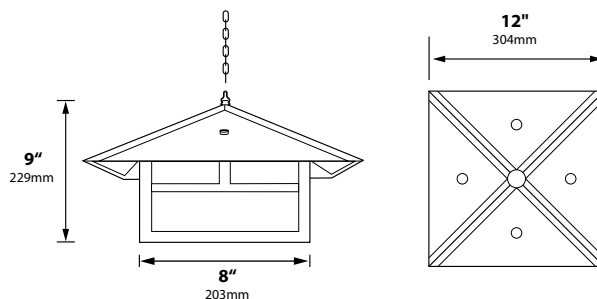

SL-12-LG



JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

12v. fixtures: 25 foot 16/2 fixture lead wire available; add -25F to catalog number.
For use with Focus CPC or hub supplied by others.

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



FOCUS[™]
INDUSTRIES

INSTALLATION INSTRUCTIONS (12V) FOR SL-12-LG HANGING LIGHT FIXTURES

Inspected by

- 1) Using Junction Box as a template mark holes to attach to surface. Drill hole if necessary.
- 2) Bring in 12v supply wire through liquid tight connector and wire to 18/2c zip cord using blue wirenuts provided.
- 3) Attach/screw box to surface with appropriate fastener. Wire supply wire to 12v and check for proper installation.

For Questions Call 1-888-882-1350

