



PUTTING GREEN LIGHTS PGL-01 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or brass body, face plate and adjustable swivel; matching extruded aluminum or brass stanchion

LENS: Sandblasted wide spread tempered flat glass

GASKET: Black neosponge closed cell; .190" thickness

LAMP SUPPLIED: 35w MR16 VWFL(FMW); 5000 hours rating (50w max.)

LAMP OPTIONS: We recommend 20w MR16 ULTRA10,000 hours average rating or 4 watt ARROW LED 50,000 average rating



SOCKET: High temp ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished. Optional finishes available

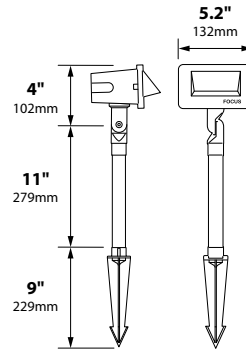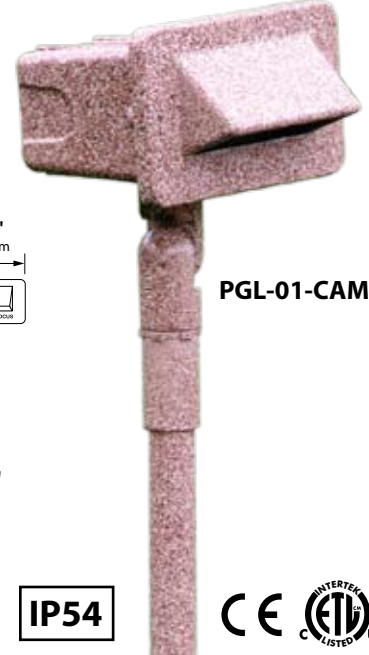

PGL-01-CAM



IP54



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PGL-01-BLT	Aluminum Putting Green Light	35w MR16 VWFL(FMW)	3.0 lbs.
PGL-01-BRS	Brass Putting Green Light	35w MR16 VWFL(FMW)	6.0 lbs.

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

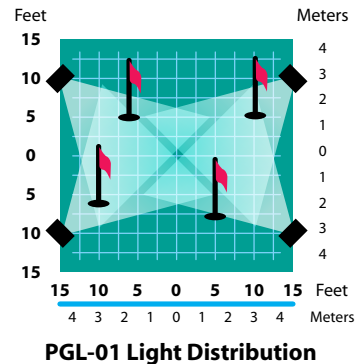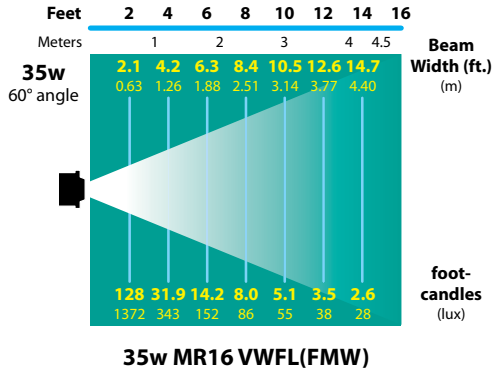

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT