



DIRECTIONAL LIGHTS RXD-03 & 04 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Copper bullet and cast brass adjustable swivel with 240° rotation

LENS: High impact clear tempered convex glass

O-RING: High temperature red silicone

LAMP SUPPLIED:

RXD-03: 20 watt MR11 FL(FTD) 5000 hours average rating (35w max)

RXD-04: 20 watt MR8 NFL 2000 hours average rating (20w max)

LAMP OPTIONS:

RXD-03: 20 watt MR11 ULTRA10,000 hours average rating or

2 watt ARROW LED MR11 50,000 hours average rating

RXD-04: 20 watt MR8 NSP 2000 hours average rating

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires


WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

For 25 foot 16/2 fixture lead wire add **-25F** to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-03 black 9" ABS stake threaded 1/2" NPS

FINISH: Copper - Unfinished only

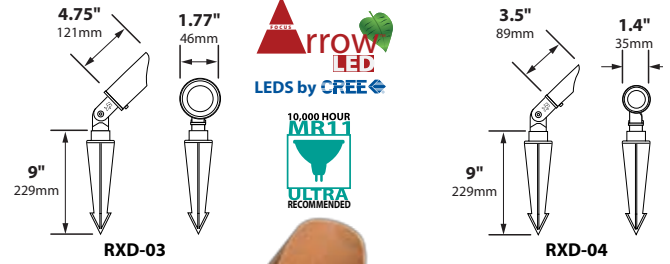


ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXD-03-COP	Copper Bullet	20w MR11 FL(FTD)	2.0 lbs.
RXD-04-COP	Copper Bullet	20w MR8 NFL	2.0 lbs.

LAMP AND STAKE **INSTALLED** TO SAVE YOU TIME AND MONEY



MOUNTING ACCESSORIES

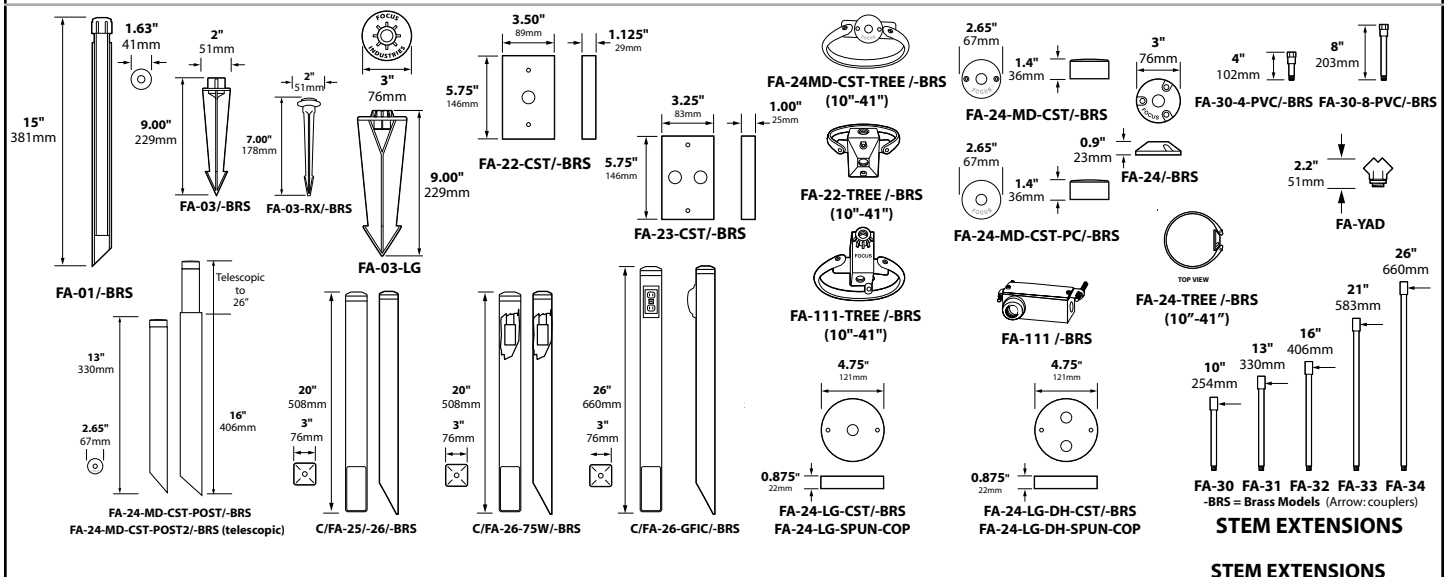

STEM EXTENSIONS
with 1/2" NPS female couplers

BEAM/GLARE CONTROL ACCESSORIES

- RXD-03**
- FA-08-17 Round 1/4" Hex Cell Louver
 - FA-10-17-BLUE Blue Tempered Glass Lens
 - FA-10-17-GREEN Green Tempered Glass Lens
 - FA-98-17 Linear Spread Tempered Glass Lens
 - FA-104-17 Wide Spread Sandblasted Glass Lens Softener
- RXD-04**
- FA-08-23 Round 1/4" Hex Cell Louver
 - FA-11-23-BLUE Blue Tempered Glass Lens
 - FA-11-23-GREEN Green Tempered Glass Lens
 - FA-98-23 Linear Spread Tempered Glass Lens
 - FA-104-23 Wide Spread Sandblasted Glass Lens Softener

**MR16 MODELS
AVAILABLE**
SEE RXD-02
CUT SHEET

JOB INFORMATION	
Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	
FOCUS INDUSTRIES INC.® 25301 COMMERCIAL DRIVE LAKE FOREST, CA 92630	
www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390	




DIRECTIONAL LIGHTS
RXD-03 & 04 SERIES




TYPE

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

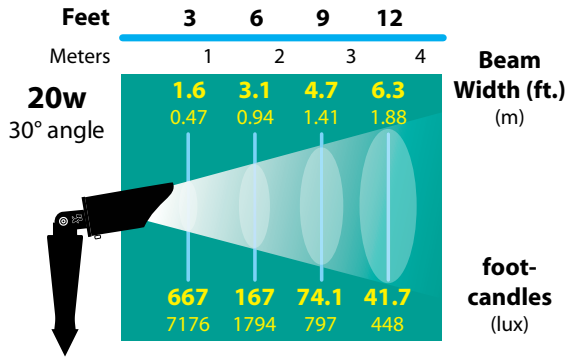

20w MR11FL(FTD)

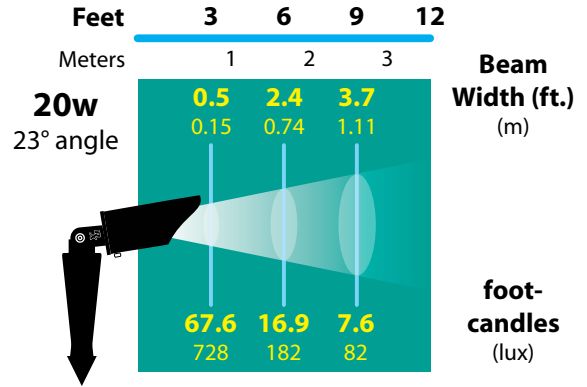

20w MR8 NFL