



# BRICK LIGHTS SL-08 120 VOLT SERIES

TYPE

## SPECIFICATIONS

### CONSTRUCTION:

FACE PLATE: Cast aluminum or brass

BACK BOX: Cast aluminum powder coated high reflective white or unfinished cast brass

LENS (-AL MODELS ONLY): Tempered opal flat glass

GASKET: Black neosponge closed cell; .190" thickness

LAMP SUPPLIED: 2 x 15w T7; 2 x 25w T8; No Lamp for T10 model - rated up to 40w T10

LAMP SUPPLIED -FL MODELS: 5w, 7w or 9w CFL, 4100°K; 10,000 hours average rating

LAMP OPTIONS: 15w T7 or 25w T8; 40w T10; CFL in 2700°K

SOCKET: Double contact bayonet, brass nickel plated lamp socket screw shell (Ba15d) with 200°C silicone lead wires or high temp ceramic medium base

SOCKET -FL MODELS: GX23 bi-pin for 5w, 7w; G23 for 9w

WIRING: Standard 120v black, white and ground

FINISH: Aluminum - Black texture polyester powder coat; optional finishes available  
Brass - Unfinished; optional finishes available

NOTE: 1/2" end holes for feed through available. Specify at time of order.




SL-08-T10NL-BRS




SL-08-ALFL5-BAR

## ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
SL-08-T7-BLT	Cast Aluminum 4 Louver Brick Light	2 X 15w T7	3.0 lbs.
SL-08-T7-BRS	Cast Brass 4 Louver Brick Light	2 X 15w T7	7.0 lbs.
SL-08-T8-BLT	Cast Aluminum 4 Louver Brick Light	2 X 25w T8	3.0 lbs.
SL-08-T8-BRS	Cast Brass 4 Louver Brick Light	2 X 25w T8	7.0 lbs.
SL-08-T10-BLT	Cast Aluminum 4 Louver Brick Light	None	3.0 lbs.
SL-08-T10-BRS	Cast Brass 4 Louver Brick Light	None	7.0 lbs.
SL-08-AL-T7-BLT	Cast Aluminum Lensed Brick Light	2 X 15w T7	3.0 lbs.
SL-08-AL-T7-BRS	Cast Brass Lensed Brick Light	2 X 15w T7	7.0 lbs.
SL-08-AL-T8-BLT	Cast Aluminum Lensed Brick Light	2 X 25w T8	3.0 lbs.
SL-08-AL-T8-BRS	Cast Brass Lensed Brick Light	2 X 25w T8	7.0 lbs.
SL-08-AL-T10-BLT	Cast Aluminum Lensed Brick Light	None	3.0 lbs.
SL-08-AL-T10-BRS	Cast Brass Lensed Brick Light	None	7.0 lbs.
SL-08-FL5(7,9)120V-BLT	Cast Aluminum 4 Louver Brick Light	5,7 or 9w CFL	3.0 lbs.
SL-08-FL5(7,9)120V-BRS	Cast Brass 4 Louver Brick Light	5,7 or 9w CFL	7.0 lbs.
SL-08-AL-FL5(7,9)120V-BLT	Cast Aluminum Lensed Brick Light	5,7 or 9w CFL	3.0 lbs.
SL-08-AL-FL5(7,9)120V-BRS	Cast Brass Lensed Brick Light	5,7 or 9w CFL	7.0 lbs.



SL-08 Back Box



SL-08



SL-08-AL

## FACE PLATE ONLY

CATALOG NO.	DESCRIPTION
FA-54-120V-BLT	120v. Cast Aluminum 4 Louver Face Plate, Clear Glass Lens
FA-54-120V-BRS	120v. Cast Brass 4 Louver Face Plate, Clear Glass Lens
FA-55-120V-BLT	120v. Cast Aluminum Lensed Face Plate, Opal Glass Lens
FA-55-120V-BRS	120v. Cast Brass Lensed Face Plate, Opal Glass Lens

## BACK BOX/SOCKET/LAMP ONLY

CATALOG NO.	DESCRIPTION	LAMP
FA-60-T7	Cast Aluminum Back Box with Lamp and Socket	2 x 15w T7
FA-60-T8	Cast Aluminum Back Box with Lamp and Socket	2 x 15w T8
FA-60-T10	Cast Aluminum Back Box with Socket	None
FA-60-FL5120V	Cast Aluminum Back Box with Lamp and Socket	5w CFL 4100°K
FA-60-FL7120V	Cast Aluminum Back Box with Lamp and Socket	7w CFL 4100°K
FA-60-FL9120V	Cast Aluminum Back Box with Lamp and Socket	9w CFL 4100°K
FA-60-T7-BRS	Cast Brass Back Box with Lamp and Socket	2 x 15w T7
FA-60-T8-BRS	Cast Brass Back Box with Lamp and Socket	2 x 15w T8
FA-60-T10-BRS	Cast Brass Back Box with Socket	None
FA-60-FL5120V-BRS	Cast Brass Back Box with Lamp and Socket	5w CFL 4100°K
FA-60-FL7120V-BRS	Cast Brass Back Box with Lamp and Socket	7w CFL 4100°K
FA-60-FL9120V-BRS	Cast Brass Back Box with Lamp and Socket	9w CFL 4100°K

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC

## JOB INFORMATION

Type: \_\_\_\_\_ Date: \_\_\_\_\_

Job Name: \_\_\_\_\_

Cat. No.: \_\_\_\_\_

Lamp(s): \_\_\_\_\_

Specifier: \_\_\_\_\_

Contractor: \_\_\_\_\_

Notes: \_\_\_\_\_

FOCUS INDUSTRIES INC.  
25301 COMMERCENTRE DRIVE  
LAKE FOREST, CA 92630


www.focusindustries.com  
sales@focusindustries.com  
(949) 830-1350 • FAX (949) 830-3390






# BRICK LIGHTS SL-08 120 VOLT SERIES


## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

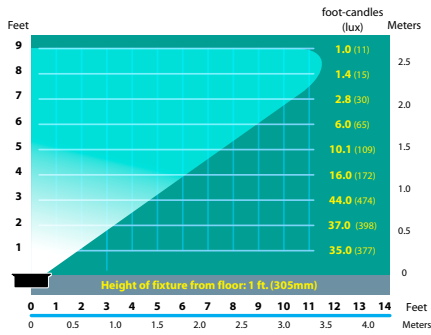


SL-08-T10 Half Spread Photometrics

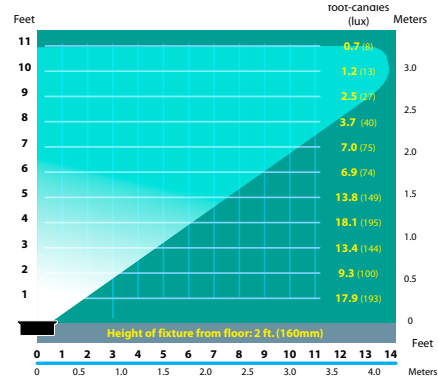


SL-08-T10 Half Spread Photometrics

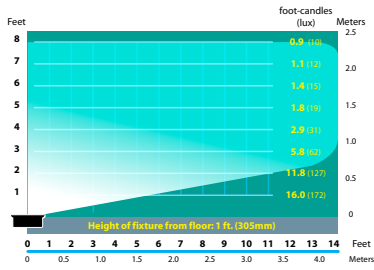


SL-08-FL-5 Half Spread Photometrics (5w)

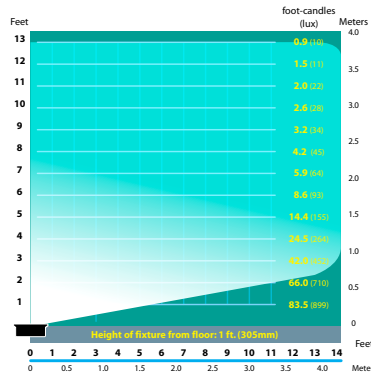


SL-08-FL-7 Half Spread Photometrics (7w)

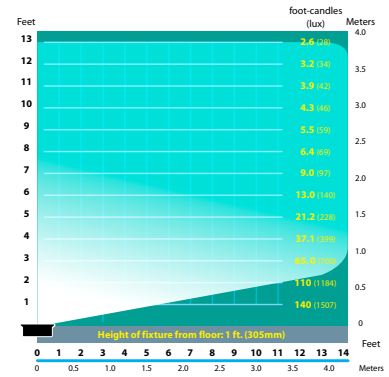


SL-08-FL-9 Half Spread Photometrics (9w)

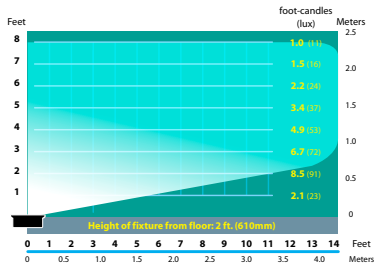

SL-08-FL-5 Half Spread Photometrics (5w)

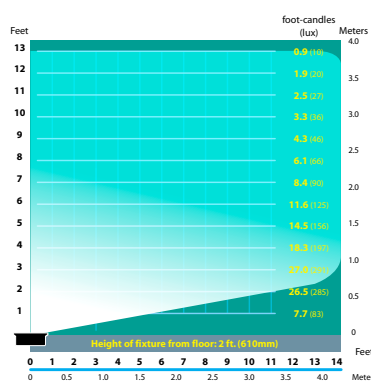

SL-08-FL-7 Half Spread Photometrics (7w)

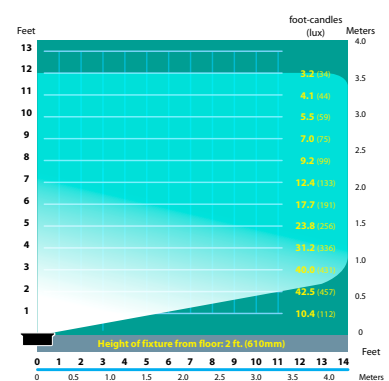


SL-08-FL-9 Half Spread Photometrics (9w)




# BRICK LIGHTS SL-08 120 VOLT SERIES


## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

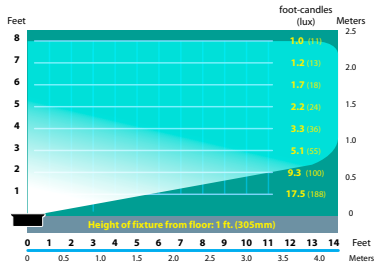


SL-08-AL-FL-5 Half Spread Photometrics (5w)

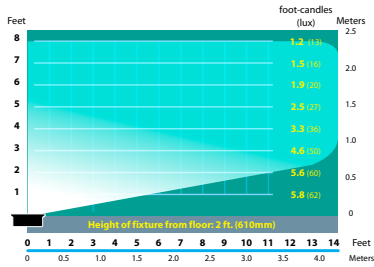


SL-08-AL-FL-5 Half Spread Photometrics (5w)

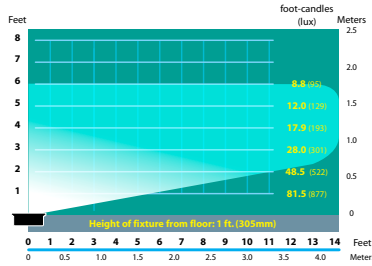


SL-08-AL-FL-7 Half Spread Photometrics (7w)

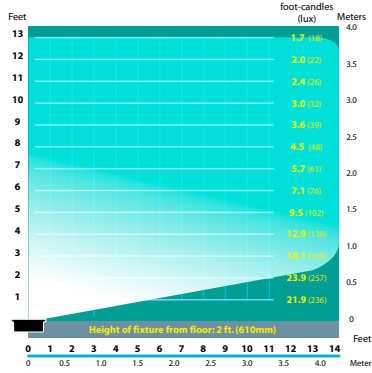

SL-08-AL-FL-7 Half Spread Photometrics (7w)

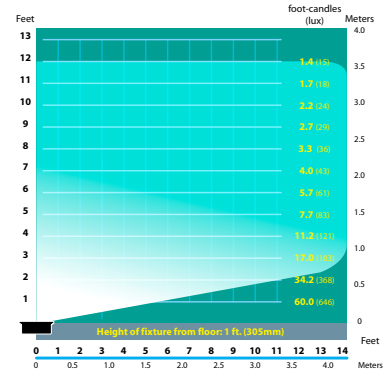

SL-08-AL-FL-9 Half Spread Photometrics (9w)

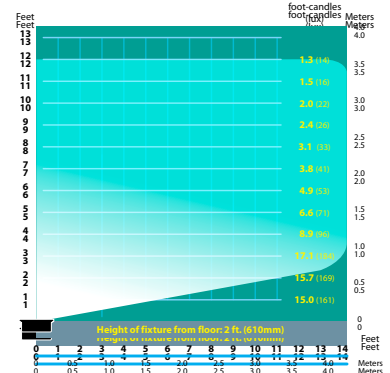

SL-08-AL-FL-9 Half Spread Photometrics (9w)