



SURFACE AND DIRECTIONAL LIGHTS SL-09-SERIES

SPECIFICATIONS

CONSTRUCTION: Mini down lights, easily adjustable aiming bracket on **-AB** models.

SOCKET: Single contact bayonet; (Ba15s) brass nickel plated screw shell and spring; ceramic contact with 200° silicone lead wires (For #1141 lamp) or double contact bayonet, (Ba15d) brass nickel plated screw shell and spring; ceramic contact with 200° silicone lead wires (For ALR12, ALR18 lamps)

LAMP: 18 watt S-8 #1141; 1200 hours average rating (25w max.), ALR12; 4000 hours average rating, (20w max.) or ALR18; 4000 hours average rating (50w max.)

WIRING: Black 3 foot 18/2 zip cord

FINISH: Optional finishes available

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	STANDARD FINISH
The following fixtures are equipped with 18 watt (#1141) lamp, 20 watt maximum, 1200 hours average rating		
SL-09	Spun aluminum mini down light	Black texture
SL-09-BRS	Spun brass mini down light	Unfinished brass
SL-09-COP	Spun copper mini down light	Unfinished copper
SL-09-AB	Spun aluminum mini down light with aiming bracket	Black texture
SL-09-AB-BRS	Spun brass mini down light with aiming bracket	Unfinished brass
SL-09-AB-COP	Spun copper mini down light with aiming bracket	Unfinished copper

ALR12 FIXTURES

The following fixtures are equipped with 20 watt ALR12 FL lamp, double contact base, 20 watt maximum. SL-09-ALR12 is available in 3-beam spreads: narrow spot 6°, medium spot 18°, and flood 32°. 4000+ hours average rating.

SL-09-ALR12	Halogen spun aluminum mini down light	Black texture
SL-09-ALR12-BRS	Halogen spun brass mini down light	Unfinished brass
SL-09-ALR12-COP	Halogen spun copper mini down light	Unfinished copper
SL-09-AB-ALR12	Halogen spun aluminum mini down light with aiming bracket	Black texture
SL-09-AB-ALR12-BRS	Halogen spun brass mini down light with aiming bracket	Unfinished brass
SL-09-AB-ALR12-COP	Halogen spun copper mini down light with aiming bracket	Unfinished copper





SL-09-COP



SL-09-AB-ALR12-COP

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

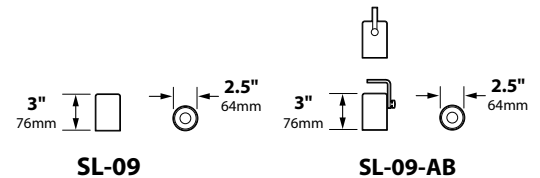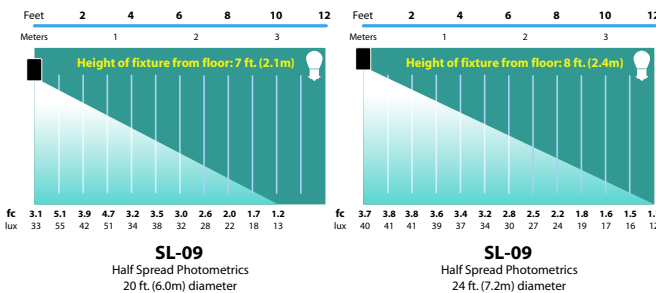

SL-09

SL-09-AB

12v. fixtures: 25 foot 16/2 fixture lead wire available; add **-25F** to catalog number. For use with Focus CPC or hub supplied by others.

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC



JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390