



WALL MOUNTING FIXTURES SL-16-SERIES

SPECIFICATIONS

CONSTRUCTION-SL-16-BRS: Extruded brass cylinder
SL-16: Extruded aluminum cylinder
LAMP: 18 watt, S-8 #1141 (25 watt max.)
LAMP LIFE: 1200 hours average rating for S-8 #1141
SOCKET: Single contact bayonet, brass nickel plated screw shell (Ba15s) 200°C silicone lead wires
WIRING: Black 5 foot 18/2 zip cord
MOUNTING: FA-24 with screws
FINISH-SL-16-BRS: Unfinished brass
SL-16: Black texture-optional finishes available

ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	FINISH
SL-16	Wall Mount Cylinder up/down light	Aluminum
SL-16-BRS	Wall Mount Cylinder up/down light	Brass

10,000 HOUR
XENON
 &
HALOGEN
 AVAILABLE




SL-16-BRS


LIGHT DISTRIBUTIONS AND PHOTOMETRICS

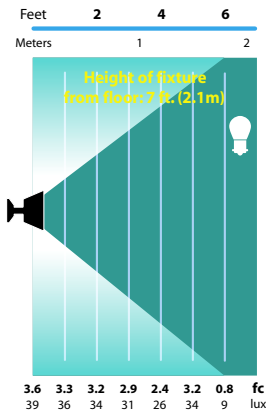

SL-16
 Light Distribution and Photometrics
 6 ft. (1.8m) radius

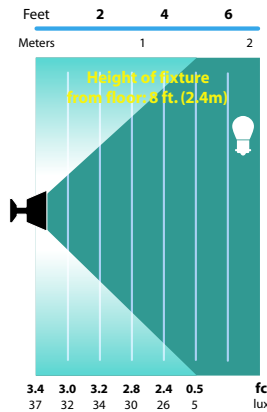

SL-16
 Light Distribution and Photometrics
 5 ft. (1.5m) radius

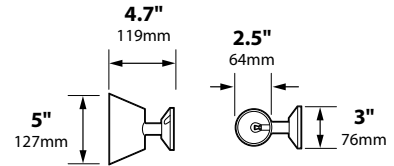

SL-16



JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat.No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
 25301 COMMERCE CENTRE DRIVE
 LAKE FOREST, CA 92630

www.focusindustries.com
 sales@focusindustries.com
 (949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC