



DIRECTIONAL SURFACE MOUNT SL-26-SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or cast brass Bullet; matching aluminum or brass surface mount junction box with adjustable bracket

LENS: High impact clear tempered convex glass

O-RING: High temperature red silicone

LAMP SUPPLIED: 20 watt MR11 FL(FTD) 2000 hours average rating (35w max)

LAMP OPTIONS: We recommend 20 watt MR11 ULTRA10,000 hours average rating. Also available in 20 watt ALR-12 model.

SOCKET: High temperature ceramic bi-pin GU5.3 with 250° C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v. only)

For 25 foot 16/2 fixture lead wire add **-25F** to catalog number.

MOUNTING: FA-111-SM small surface mount junction box


FINISH: Aluminum-Black texture polyester powder coat–optional finishes available
Brass-Unfinished brass–optional finishes available




SL-26-BLT

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	EST. SHIP WEIGHT
SL-26-BLT	Cast aluminum surface mount Bullet	20w MR11 FL(FTD)	2.0 lbs.
SL-26-BRS	Cast brass surface mount Bullet	20w MR11 FL(FTD)	3.0 lbs.



LIGHT DISTRIBUTIONS AND PHOTOMETRICS

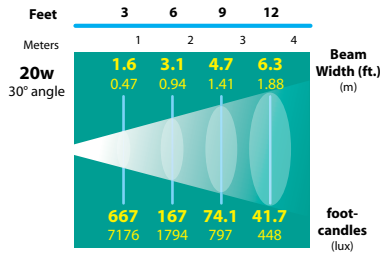

20w MR11 FL (FTD)



ACCESSORIES

CATALOG NO.	DESCRIPTION
FA-08-17	Round 1/8"Hex Cell Louver
FA-11-17-BLUE	Blue Tempered Glass Lens
FA-11-17-GREEN	Green Tempered Glass Lens
FA-98-17	Linear Spread Tempered Glass Lens
FA-104-17	Wide Spread Tempered Glass Lens Softener

JOB INFORMATION	
Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	
FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST, CA 92630	
www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390	

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC