




# COMMERCIAL STEP LIGHT SL-31-SERIES



## SPECIFICATIONS

- FACE PLATE:** Cast brass (-BRS) or cast aluminum
- BACK BOX HOUSING:** White powder coated cast aluminum  
-BRS models have unfinished cast brass housing
- GASKET:** Black neosponge 0.190" thick closed cell
- REFLECTOR:** Highly polished specular aluminum
- LAMP SUPPLIED (incandescent models):** 2 x 18 watt, S-8 #1141 (50 watt max.); 1200 hours average rating  
**(MR16):** 20 watt MR16 FL (BAB) (50 watt max.); 5000 hours average rating  
**(T10 models):** None supplied; rated for 40 watt T10  
**(FL models):** 5, 7, 9 compact fluorescent, 41°K; 10,000 hours average rating
- LAMP OPTIONS (incandescent models):** We recommend 10,000 hours average rating Xenon (-X) or Halogen (-H) or 1.5w 35,000 hours average rating OMNI LED (Single contact bayonet base only).  
**(MR16):** 20 watt MR16 ULTRA 10,000 hours average rating, 20 watt MR16 TITAN 18,000 hours average rating or 4w ARROW LED 50,000 hours average rating  
**(T10 models):** 5, 7, 9 compact fluorescent, 41°K; 10,000 hours average rating  
**(FL models):** 5, 7, 9 compact fluorescent, 41°K; 10,000 hours average rating
- SOCKET (incandescent models):** Single contact bayonet; brass nickel plated Ba15s with 200° C silicone lead wires  
**(MR16):** High temperature ceramic GU5.3 bi-pin with 250° C silicone lead wires  
**(T10 models):** High temperature ceramic medium base with 200° C silicone lead wires  
**(FL models):** G23 bi-pin for 5, 7 or 9 watt, with type-1 outdoor magnetic clamped core ballast
- WIRING:** Black 3 foot 18/2 zip cord for 12v. Standard black, white, and ground, 18 gauge for 120v.
- CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (1/2", 10/2 or 8/2 only) 12v. only
- FINISH:** Optional finishes available

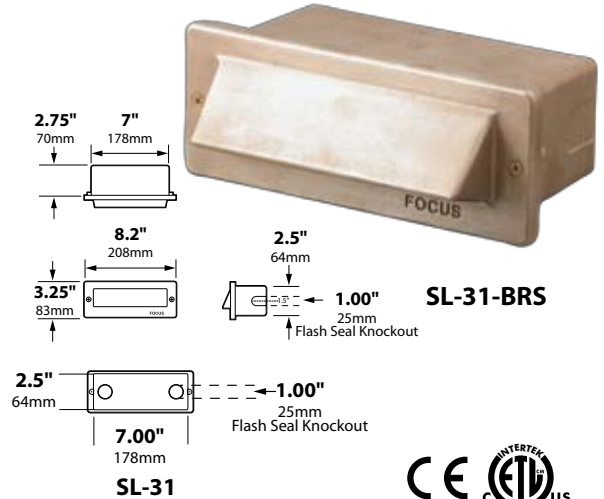

Flash Seal Knockouts are for 1/2" to 3/4" conduit fittings  
Same on end feed



## ORDERING INFORMATION

CATALOG NO.	FACE PLATE ONLY	DESCRIPTION	LENS MATERIAL	FACE PLATE STANDARD FINISH
<b>INCANDESCENT</b>				
2 x 18 watt S-8 #1141, 50 watt maximum				
SL-31	FA-141	Cast aluminum louvered step light	White glass	Black texture
SL-31-BRS	FA-141-BRS	Cast brass louvered step light	White glass	Solid brass
<b>MR16 LAMPS</b>				
20 watt MR16 FL (BAB), 50 watt maximum				
SL-31-MR16	FA-141-MR16	Cast aluminum louvered step light	Linear spread glass	Black texture
SL-31-MR16-BRS	FA-141-MR16-BRS	Cast brass louvered step light	Linear spread glass	Solid brass
<b>T10 LAMPS</b>				
Medium base 20 through 40 watt T10, 40 watt maximum, fixture supplied without lamp.				
SL-31-T10-NL	FA-141	Cast aluminum 1 louver step light	White glass	Black texture
SL-31-T10-NL-BRS	FA-141-BRS	Cast brass 1 louver step light	White glass	Solid brass
<b>120 VOLT COMPACT FLUORESCENTS</b>				
5, 7, or 9 watt compact fluorescents, please specify at time of order.				
SL-31-FL-5, 7, 9	FA-141	Cast aluminum 1 louver step light	White glass	Black texture
SL-31-FL-5, 7, 9-BRS	FA-141	Cast brass 1 louver step light	White glass	Solid brass



## ACCESSORIES

CATALOG NO.	DESCRIPTION	LAMP AND VOLTAGE
FA-65	Cast aluminum box with lamp and socket	18w SC (12v.)
FA-60	Cast aluminum box with lamp and socket	2 x 18w SC (12v.)
FA-60-H	Cast aluminum box with lamp and socket	2 x 20w halogen (12v.)
FA-60-FL	Cast aluminum box with lamp and socket	5, 7, or 9w comp. fluor. (specify wattage) (120v.)
FA-60-MR16	Cast aluminum box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-60-X	Cast aluminum box with lamp and socket	2 x 20w Xenon (12v.)
FA-60-T7	Cast aluminum box with lamp and socket	2 x 15w T7 (120v.)
FA-60-T8	Cast aluminum box with lamp and socket	2 x 25w T8 (120v.)
FA-60-T10	Cast aluminum box with medium base socket	(T10, 120v. option)
FA-60-BRS	Cast brass box with lamp and socket	2 x 18w SC (12v.)
FA-60-BRS-H	Cast brass box with lamp and socket	2 x 20w halogen (12v.)
FA-60-BRS-FL	Cast brass box with lamp and socket	5, 7, or 9w comp. fluor. (specify wattage) (120v.)
FA-60-BRS-MR16	Cast brass box with lamp and socket	20w MR16 FL (BAB) (12v.)
FA-60-BRS-X	Cast brass box with lamp and socket	2 x 20w Xenon (12v.)
FA-60-BRS-T7	Cast brass box with lamp and socket	2 x 15w T7 (120v.)
FA-60-BRS-T8	Cast brass box with lamp and socket	2 x 25w T8 (120v.)
FA-60-BRS-T10	Cast brass box with medium base socket	(T10, 120v. option)

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC

## LIGHTING DISTRIBUTIONS AND PHOTOMETRICS

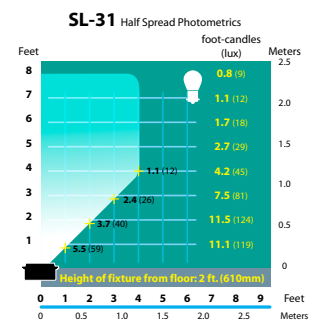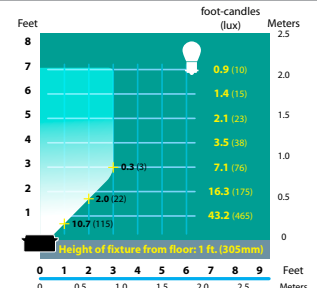

## JOB INFORMATION

Type: \_\_\_\_\_ Date: \_\_\_\_\_

Job Name: \_\_\_\_\_

Cat. No.: \_\_\_\_\_

Lamp(s): \_\_\_\_\_

Specifier: \_\_\_\_\_

Contractor: \_\_\_\_\_

Notes: \_\_\_\_\_

**FOCUS INDUSTRIES INC.**  
25301 COMMERCENTRE DRIVE  
LAKE FOREST, CA 92630

**www.focusindustries.com**  
sales@focusindustries.com  
(949) 830-1350 • FAX (949) 830-3390