



INSTALLATION INSTRUCTIONS FOR ALL 120 VOLT AREA & PATH LIGHT FIXTURES

INSPECTED BY:


NOTE: Must be installed by a licensed electrician per local codes

READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLING FIXTURE

1. Turn off power at fuse box or circuit breaker panel before installation
2. Thread fixture onto junction box or other mounting device (we recommend the FA-26 mounting pedestal) until it is firmly installed using thread sealant.
3. Connect fixture leads to line in leads observing polarity - black to black, white to white and green to ground - using UL approved gel filled connectors.
4. If using junction box, close and seal making sure not to pinch wires that may be between cover and box.
5. Coat any exposed fixture threads with thread sealant to keep moisture from entering junction box or other mounting device.
6. Install lamp making sure to only use lamp style and wattage specified on fixture label.
7. Supply power to fixture and check for proper operation.

IMPORTANT SAFETY INSTRUCTIONS TO REDUCE THE RISK OF FIRE AND INJURY TO PERSONS:

1. Lamp gets hot quickly; turn off, unplug/disconnect and allow to cool down before replacing the light bulb.
2. DO NOT touch hot lens, guard or enclosure.
3. DO NOT look into lamp when on.
4. Keep lamp away from materials that may burn.
5. Use only with wattage/lamp marked on fixture warning and instructions.
6. Use the right light bulb base with the right socket.
7. DO NOT touch lamp at anytime. Use a lint-free cloth when handling Halogen light bulbs as oil from skin may damage lamp and shorten lamp life.
8. DO NOT operate fixture with missing or damaged shield or lens.

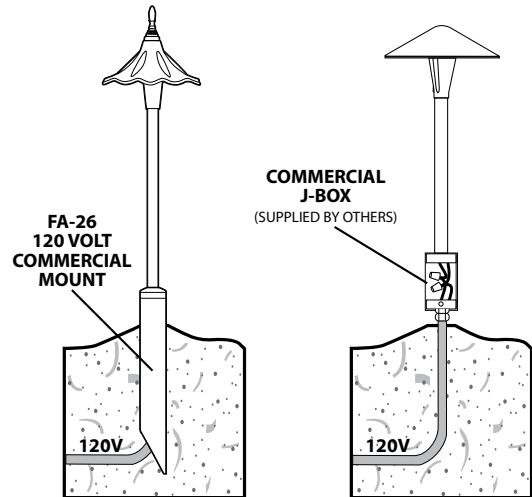

For Questions Call 1-888-882-1350



INSTALLATION INSTRUCTIONS FOR ALL 120 VOLT AREA & PATH LIGHT FIXTURES

INSPECTED BY:


NOTE: Must be installed by a licensed electrician per local codes

READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLING FIXTURE

1. Turn off power at fuse box or circuit breaker panel before installation
2. Thread fixture onto junction box or other mounting device (we recommend the FA-26 mounting pedestal) until it is firmly installed using thread sealant.
3. Connect fixture leads to line in leads observing polarity - black to black, white to white and green to ground - using UL approved gel filled connectors.
4. If using junction box, close and seal making sure not to pinch wires that may be between cover and box.
5. Coat any exposed fixture threads with thread sealant to keep moisture from entering junction box or other mounting device.
6. Install lamp making sure to only use lamp style and wattage specified on fixture label.
7. Supply power to fixture and check for proper operation.

IMPORTANT SAFETY INSTRUCTIONS TO REDUCE THE RISK OF FIRE AND INJURY TO PERSONS:

1. Lamp gets hot quickly; turn off, unplug/disconnect and allow to cool down before replacing the light bulb.
2. DO NOT touch hot lens, guard or enclosure.
3. DO NOT look into lamp when on.
4. Keep lamp away from materials that may burn.
5. Use only with wattage/lamp marked on fixture warning and instructions.
6. Use the right light bulb base with the right socket.
7. DO NOT touch lamp at anytime. Use a lint-free cloth when handling Halogen light bulbs as oil from skin may damage lamp and shorten lamp life.
8. DO NOT operate fixture with missing or damaged shield or lens.

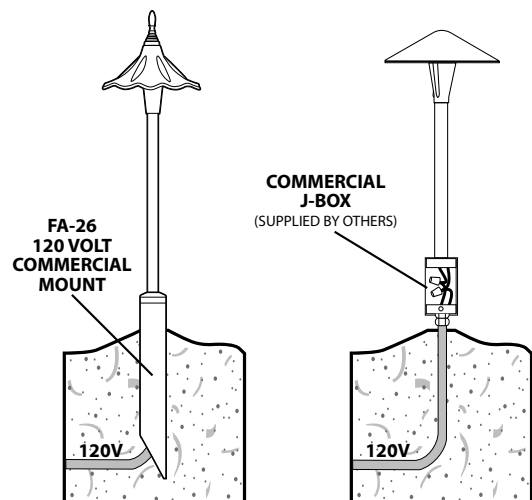

For Questions Call 1-888-882-1350