



POST/SURFACE LIGHTS SL-59 SERIES

TYPE



SPECIFICATIONS

CONSTRUCTION: Spun copper or brass

LENS: None

LAMP SUPPLIED: None

LAMP OPTIONS: We recommend 2,000 hours average rating Halogen (-HBP) or 5,000 hours average rating Xenon (-XBP)

SOCKET: G4 Bi-Pin Socket

WIRING: Black 5 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only


MOUNTING: Keyhole slot mounts with wood screws included

FINISH: Unfinished. Optional finishes available




ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
SL-59-NLCOP	No Lamp BP, Copper Post Light	None, Bi-Pin socket	1.0 lbs.
SL-59-HBPCOP	20w H BP, Copper Post Light	20w Halogen Bi-Pin	1.0 lbs.
SL-59-XBPCOP	20w X BP, Copper Post Light	20w Xenon Bi-Pin	1.0 lbs.
SL-59-NLBRS	No Lamp BP, Brass Post Light	None, Bi-Pin socket	1.0 lbs.
SL-59-HBPBRS	20w H BP, Brass Post Light	20w Halogen Bi-Pin	1.0 lbs.
SL-59-HBPBRS	20w H BP, Brass Post Light	20w Xenon Bi-Pin	1.0 lbs.

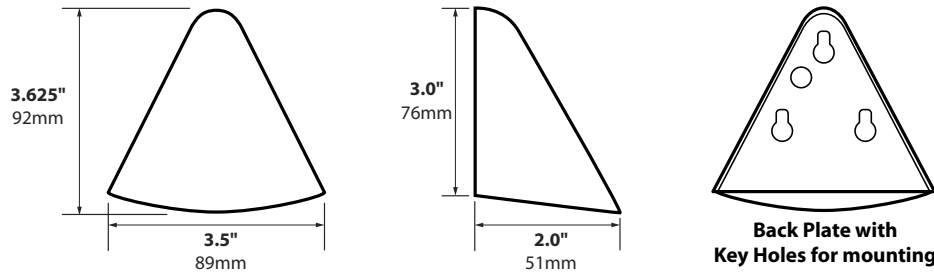

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

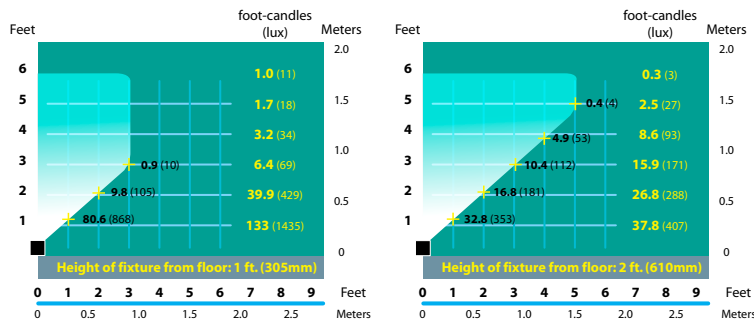

JOB INFORMATION	
Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	
FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST, CA 92630 www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT