



WELL LIGHTS SL-20-LG H.I.D. SERIES

TYPE

SPECIFICATIONS

CONSTRUCTION:

BODY: Fiberglass reinforced bronze composite with molded brass inserts for screws
LENS HOLDER & GRATE: Fiberglass reinforced bronze composite, cast aluminum or cast brass

LENS: High impact clear tempered convex glass

LAMP SUPPLIED: None (100w max)

LAMP OPTIONS: ED17 Metal Halide or High Pressure Sodium. See ordering information below

BALLAST: Internal magnetic ballast to correspond with lamp type and wattage.

SOCKET: High temperature ceramic medium base - 600 volts, 660 watts 4 K.V. pulse rated.
Brass nickel-plate screw shell with 250°C lead wires (100w max)

REFLECTOR: Highly polished specular aluminum

WIRING: Standard 120 volt Black, White and Ground 9" lead wires

FINISH: Composite - Bronze

Aluminum Lens Holder/Grate - Black texture polyester powder coat; optional finishes available
Brass Lens Holder/Grate - Unfinished brass; optional finishes available



SL-20-LGL



ORDERING INFORMATION

CATALOG NO. DESCRIPTION LAMP OPTIONS VOLTAGE SHIP WEIGHT

Part Numbers below are for 100% composite well lights. For Aluminum lens holder or grate at -BLT (or optional powder coat color code) to end of catalog number. For Brass lens holder or grate add -BRS (or optional Acid finish) to end of catalog number.

METAL HALIDE SERIES

SL-20-LGL-120MH-M130	Well Light, Composite Lens Holder	35w PAR20 or 35w PAR30	120v or 277v (2 taps)	10.0 lbs.
SL-20-LGL-120MH-M98	Well Light, Composite Lens Holder	70w R40 or 70w PAR38	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.
SL-20-LGL-120MH-M90	Well Light, Composite Lens Holder	100w PAR38	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.

SL-20-LGG-120MH-M130

SL-20-LGG-120MH-M130	Well Light, Composite Lens Grate	35w PAR20 or 35w PAR30	120v or 277v (2 taps)	10.0 lbs.
SL-20-LGG-120MH-M98	Well Light, Composite Lens Grate	70w R40 or 70w PAR38	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.
SL-20-LGG-120MH-M90	Well Light, Composite Lens Grate	100w PAR38	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.


HIGH PRESSURE SODIUM SERIES

SL-20-LGL-120HPS35	Well Light, Composite Lens Holder	35w-S76 ED17	120v or 277v (2 taps)	10.0 lbs.
SL-20-LGL-120HPS50	Well Light, Composite Lens Holder	50w-S68 ED17	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.
SL-20-LGL-120HPS70	Well Light, Composite Lens Holder	70w-S62 ED17	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.
SL-20-LGL-120HPS100	Well Light, Composite Lens Holder	100w-S54 ED17	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.

SL-20-LGG-120HPS35

SL-20-LGG-120HPS35	Well Light, Composite Lens Grate	35w-S76 ED17	120v or 277v (2 taps)	10.0 lbs.
SL-20-LGG-120HPS50	Well Light, Composite Lens Grate	50w-S68 ED17	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.
SL-20-LGG-120HPS70	Well Light, Composite Lens Grate	70w-S62 ED17	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.
SL-20-LGG-120HPS100	Well Light, Composite Lens Grate	100w-S54 ED17	Multi Volt 120/208/240/277 (4 taps)	11.0 lbs.

OPTIONAL TRIPLE TUBE FLUORESCENT MODELS AVAILABLE. CONSULT FACTORY FOR DETAILS

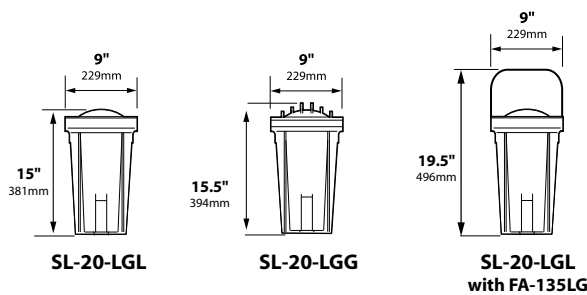

ACCESSORIES

CATALOG NO.	DESCRIPTION
FA-08-SL20	Round 1/4" Hex Cell Louver
FA-10-SL20-CLEAR	Round 1/4" Clear Tempered Glass
FA-10-SL20-BLUE	Blue Tempered Flat Glass
FA-10-SL20-GREEN	Green Tempered Flat Glass
FA-133	Cast Aluminum Lens Holder
FA-133-BRS	Cast Brass Lens Holder
FA-134	Cast Aluminum Grate
FA-134-BRS	Cast Brass Grate
FA-135-LG	Stamped Aluminum Eyebrow
FA-135-LG-BRS	Stamped Brass Eyebrow

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC. 25301 COMMERCENTRE DRIVE LAKE FOREST, CA 92630
www.focusindustries.com sales@focusindustries.com (949) 830-1350 • FAX (949) 830-3390

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC