

## **SURFACE STEP LIGHTS PL-24-18 SERIES**



## **SPECIFICATIONS**

**CONSTRUCTION:** Single or double cast aluminum fixture(s) on a 52" galvanized steel 2"x4" post

LENS: None

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)

**LAMP OPTIONS:** We recommend 10,000 hours average rating Xenon (-X) or Halogen (-H) or

3w 50,000 hours average rating OMNI-3 LED (-LED3)

120v: 15w T7 or 25w T8

**SOCKET:** Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s); double contact bayonet base (Ba15d) for 120v, both with 200°C silicone lead wires

**WIRING:** Black 5 foot 18/2 zip cord from base of fixture (12v only) For 25 foot 16/2 fixture lead wire add -25F to catalog number.

120v Standard wiring

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable


(12/2, 10/2 or 8/2 only) 12v only

**MOUNTING:** None

FINISH: Black texture polyester powder coat. Optional finishes available


## **ORDERING INFORMATION**

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT		
PL-24-181BLT	Cast Aluminum Surface Light 52" Post	18w S8 #1141	10.0 lbs.		
PL-24-182BLT	2x Cast Aluminum Surface Lights	18w S8 #1141	12.0 lbs.		

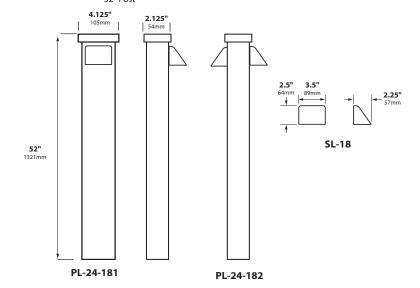



## LIGHT DISTRIBUTIONS AND PHOTOMETRICS



		mertek
JOB INFORMATION		
Гуре:	Date:	
lob Name:		
Cat. No.:		
_amp(s):		
Specifier:		
Contractor:		

FOCUS INDUSTRIES INC. www.focusindustries.com 25301 COMMERCENTRE DRIVE sales@focusindustries.com LAKE FOREST, CA 92630 (949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT

PL-24-18 Cut Sheet 030118 BRASS & COPPER ONLY